

SeeEyes® Series [SC-HLR04P]

4 IN / 4 OUT HD-SDI Repeater



SC-HLR04 is a 4 channel HD-SDI repeater to extend transmission distance up to 150m (Full HD: 1.5G) with RG-59, 100m (Full HD: 3G) over RG-6. The repeater receives 4 HD-SDI signal and distributes them to 4 outputs.

Features

- Transmission distance extension
- 4 IN 4 OUT
- Transmission distance up to 150m, (Full HD: 1.5G) over RG-59
- SMPTE 292/424M compliant
- Surge Protection Function
- LED Indication of signals and power transmission
- Compact and light-weight aluminum case

[SC-HLR04P]




HD-SDI Transmission

Specifications

MODEL		SC-HLR04P	
Video In / Out		HD-SDI	
Power In		DC 12V~48V	
Power Consumption		DC 12V 600mA	
Max. Distance		RG-59 (Belden 1505A) 150m (1.5G) RG-6 (Belden 1694A) 200m (1.5G)	
Bandwidth		270Mbps ~ 3Gbps	
Connection Port	SDI In / Out	BNC-F(75Ω) x 4CH	
	Power In	2Pin Terminal Block	
LED	SDI	Green	On: Normal
	Power	Yellow	On: Normal, Flickering: Check
Temperature / Humidity		0°C ~ +50°C / 0 ~ 80%	
Case body / Weight		Aluminum / 200g	
Dimensions(mm)		94(W) X 141(H) X 27(D)	

Dimensions

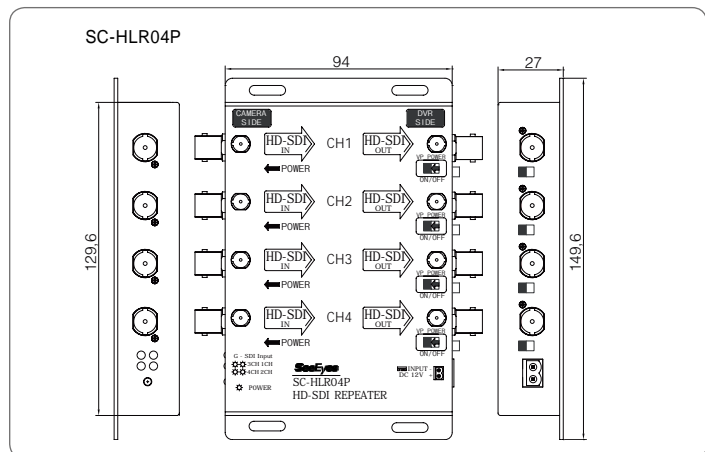

Connection Diagram

